

GBR-200 Series

Characteristic

GBR-200 series high voltage resistors are made in a thick film technology on ceramic substrates (Al_2O_3 96%). These elements are used in high voltage applications requiring high stability and resistance. Other values of resistance are available on request.


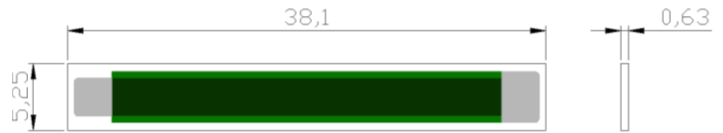


Fig. 1. Preview with dimensions [mm]

<u>Parameter</u>	<u>Value</u>
Nominal resistance	47 k Ω
Range of available resistance	0,1 - 500 k Ω
Tolerance	10 %
Rated power	1 W
Max. operating voltage (pulsed)	25 kV
Max. voltage (3s) (pulsed)	33 kV
Temperature coefficient of resistance	100 ppm/ $^{\circ}\text{C}$
Operating temperature	-20 ... +70 $^{\circ}\text{C}$

Product marking

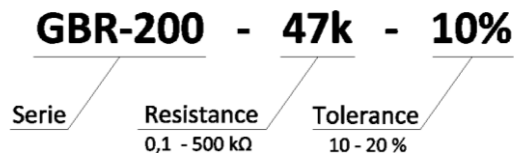

TELPOD S.A.

str. Pilsudskiego 63A
32-050 Skawina
www.telpod.pl

Technical division: +48 (0)12 257 10 12
Sales division: +48 (0)12 257 10 35
fax: +48 (0)12 257 10 13
e-mail: thickfilm@telpod.pl

date: 04 / 2015
Copyright 2015 by Telpod